

# DATA SHEET



## USB-C 2.0 Male to Male Cable (3A)

Connect any two standard USB-C enabled devices to simultaneously charge and transfer data

### OVERVIEW

---

The USB-C to C 2.0 Male to Male Cable is the perfect solution for connecting two standard USB-C enabled devices or accessories for charging and data transfer.

Ensure that a USB-C equipped laptop, smartphone, or tablet is fully charged and ready to go with the 3A charging output, while simultaneously transferring photos, music, or data at speeds up to 480 Mbps.

The USB-C connector has a symmetrical design which is identical on both sides, so no more worrying about whether it's upside-down or right-side-up. It will plug in the first time, every time—while preventing damage to the connector port.

### FEATURES

---

- 3A charging output
- Data transfer speeds up to 480 Mbps
- Reversible, symmetrical USB-C connector

### ITEM DESCRIPTION

---

88825      0.9m USB-C 2.0 Male to Male Cable (3A)

# DATA SHEET


## SPECIFICATIONS: USB-C 2.0 Male to Male Cable (3A)

### ELECTRICAL SPECIFICATIONS:


- NO—UL 32AWG (7/0.08TC)\*1P+32AWG(7/0.08TC)\*1C+24AWG (26/0.1TC+25OD)\*1C+3E(19/0.05TC+25OD)+AB(16/9/0.06TC 95%TC) OD:3.0mm ~ Black
- Rated Temperature: 80°C ; Voltage: 30 V
- Max Conductor Resistance at 20°C: 32AWG , 530 OHMS/KM
- Insulation Resistance: 10M-KM MIN at 20°C DC 500V.(EIA—364—21)
- Dielectric Strength: AC 500V/1 Minute No Breakdown.(EIA—364—20)

### PHYSICAL SPECIFICATIONS:


- Operating Temperature: 0 ~ 50°C; 15-85% RH (Non-Condensing)
- Storage Temperature: -25 ~ 70°C; 15-85% RH (Non-Connective)
- P1: USB3.1 C Type Male: Contacts Terminal Gold Flash, Nickel Plated Shell; Black Insulation
- P2: USB3.1 C Type Male: Contacts Terminal Gold Flash, Nickel Plated Shell; Black Insulation
- Moulding Material: Black PVC Conform RoHS
- Product is CE marked and conforms to 2011/65/EU RoHS2

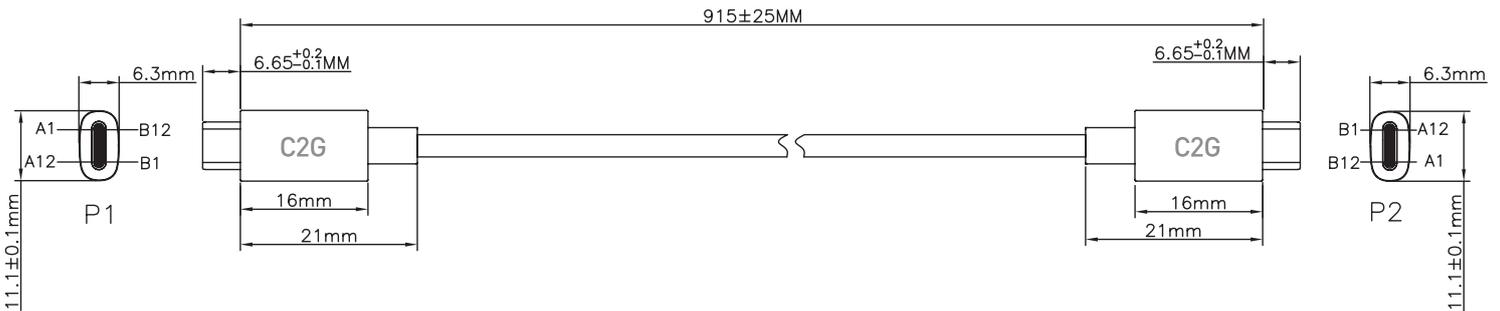

### CABLE Cross Section.:

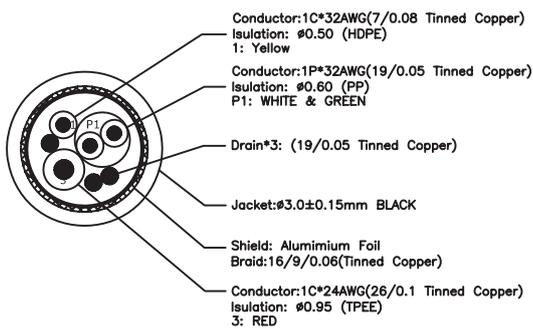

### Pin Assignment

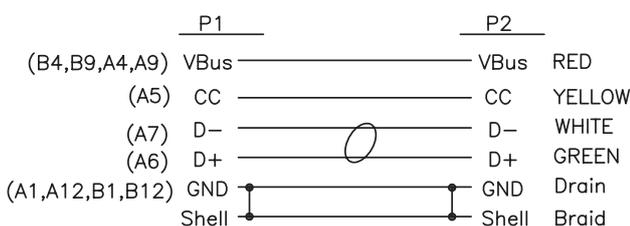

**C2G**  
A brand of **Legrand**

Great King Street North  
Birmingham, West Midlands B19 2LF  
UK Phone (0)800 328 2916  
EMEA Phone +44 (0)1952 677300  
www.c2g.com/uk

Follow Us

